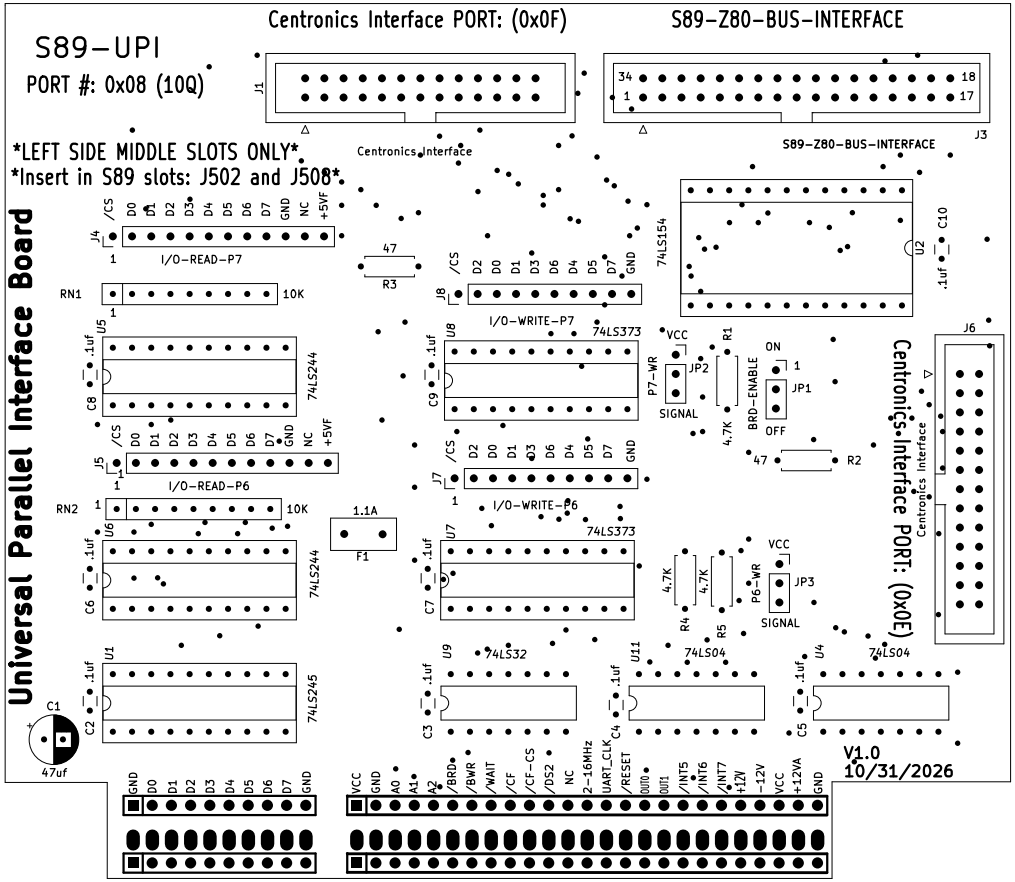
S89-UPI
PORT #: 0x08 (10Q)
Centronics Interface PORT: (0x0F)
S89-Z80-BUS-INTERFACE
LEFT SIDE MIDDLE SLOTS ONLY
Insert in S89 slots: J502 and J508
Universal Parallel Interface Board
Centronics Interface PORT: (0x0E)
Centronics Interface
S89-Z80-BUS-INTERFACE
I/O-READ-P7
I/O-WRITE-P7
I/O-READ-P6
I/O-WRITE-P6
74LS244
74LS245
74LS373
74LS154
74LS32
74LS04
P7-WR
P6-WR
SIGNAL
BRD-ENABLE
ON
OFF
VCC
GND
NC
+5VF
10K
4.7K
47
1.1A
47uf
V1.0
10/31/2026